



Telehealth Solution


Easy, flexible and mobile way to collect patients' vital signs from multiple devices



- Integrates patient information, video images, and vital signs to improve diagnosis efficiency
- Supports instant telemedicine consultations from various specialties
- Supports external image source, screen extension and video recording
- Remote consultations to reduce infection risks for family members and medical staff
- Highly mobile cart allows caregivers to provide best patient care



Provides virtual consultations with various specialists, enabling instant diagnosis across regions and departments

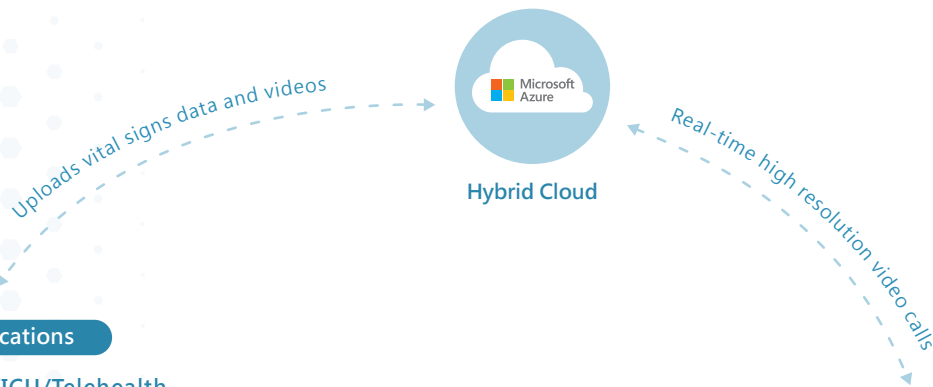

Suitable applications

Isolation room/ICU/Telehealth

Integrates a wide selection of devices:
Sphygmomanometer, oximeter, thermometer and more



Instant visibility of all patient info
Supports multi-person video call



Combines Patient Information into One Dashboard

- Vital Signs**
- Image Source**
Camera / Visualizer (Document Camera) / Others
- Screen Extension**
- Patient Information**
- Function Area**
Doctor list / Patient list / Call / Stop / Mute / Screenshot / Record / PTZ control

Features on Client Side

- ✓ Intuitive Graphical User Interface
- ✓ Flexible screen sharing
- ✓ Full screen recording, saving all data in the surgical process
- ✓ Virtual consultations with specialists in various fields
- ✓ Remote PTZ camera control

Features on Server Side

- ✓ Record for attendance and meeting time
- ✓ Instant retrieval of patient data, vital sign records and external image source
- ✓ User permission control



Specifications

| Model Name | iMTelehealth-Lite | iMTelehealth-STD | iMTelehealth-PRO |
|----------------------------------|---|--|---|
| |  |  |  |
| iMTelehealth Software | √ | √ | √ |
| Mounting Option | Single monitor | Single monitor | Dual monitor |
| AIO Size | 12" - 15" | 15" - 21.5" | 15" - 21.5" |
| Resolution | 1920x1080 | 1920x1080 | 1920x1080 |
| Weight Capacity | 10 kg | 15 - 20 kg | 15 - 20 kg |
| Height Adjustment Range | 1000 mm | 907 - 1207 mm | 907 - 1207 mm |
| Cleaning Way | Can be cleaned with 75% alcohol | | |
| Display Compatibility | VESA 75/100mm | VESA 75/100mm | VESA 75/100mm |
| Rechargeable Battery | X | Type: Lithium-ion Capacity: 420 Wh | Type: Lithium-ion Capacity: 420 Wh |
| Work Surface (WxD) | 460 x 341 mm | 538 x 449 mm | 538 x 449 mm |
| Caster | 5casters" 3 locking | 4casters" 2 locking | 4casters" 2 locking |
| PTZ Camera* | X | √ | √ |
| Speaker* | X | √ | √ |
| Visualizer (Document Camera)* | X | √ | √ |
| Sphygmomanometer* | √ | √ | √ |
| Oximeter* | √ | √ | √ |
| Thermometer* | √ | √ | √ |

*Optional Accessories